

MV-ACC-01-1102-x GigE, SUPERFLEXIBLE CAT.5E CABLE, STP, 2×RJ45




Cable Description:

| Accessory | Description | Length | Applicable Camera |
|---|--|----------------|-----------------------|
| GigE, Superflexible Cable CAT.5E, STP, 2×RJ45 for Hikvision GigE Series | Network Connection Cable for Hikvision GigE Camera | 3/5/10/15/30 m | Hikvision GigE Camera |

Order Models:

- 3m Superflexible Network Cable: MV-ACC-01-1102-3m
- 5m Superflexible Network Cable: MV-ACC-01-1102-5m
- 10m Superflexible Network Cable: MV-ACC-01-1102-10m
- 15m Superflexible Network Cable: MV-ACC-01-1102-15m
- 30m Superflexible Network Cable: MV-ACC-01-1102-30m

Cable Overview:

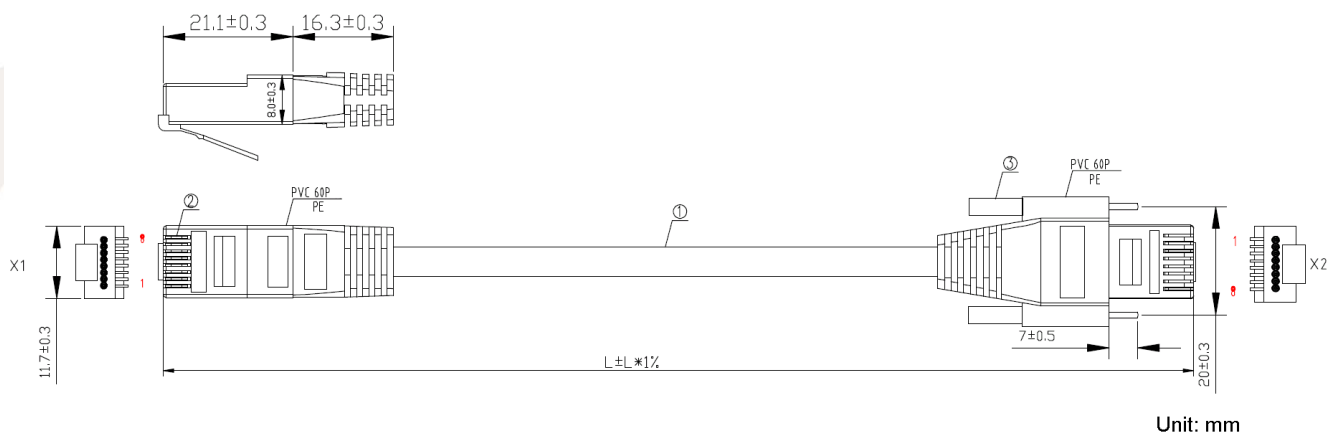

Unit: mm



Cable Parameters:

Physical Specifications

| | |
|---------------------------|-----------------|
| Cable Cross-section | 26 AWG |
| Cable Diameter | 6.5 mm |
| Cable Insulation Material | HD-PE |
| Outer Jacket | PVC |
| Cable Color | Black |
| Minimum Bending Radius | 65 mm |
| Maximum Bending Cycles | 5 million times |

Table 1: Physical Specifications

Electrical Specifications

| | |
|---------------------------|-----------|
| Maximum Operating Voltage | 150 V |
| Cable Resistance | ≤150 Ω/km |

Table 2: Electrical Specifications

Environmental Specifications

| | |
|-----------------------------|-------------|
| Operating Temperature Range | -5 °C-60 °C |
|-----------------------------|-------------|

Table 3: Environment Specifications

Plug Specifications

| | |
|--------------------------|--------------------|
| Durability | >750 mating cycles |
| Contact Resistance | ≤20 mΩ |
| Contact Plating | Gold |
| Plug Insulation Material | PVC |

Table 4: Plug Specifications

Compliance

| | |
|-----------------|---|
| RoHS Compliance | ✓ |
| UL Compliance | ✓ |

Table 5: Compliance